

Generated Floor Plan


testgen1

+ New Plan

All Plans

Delete


Generated Floor Plan

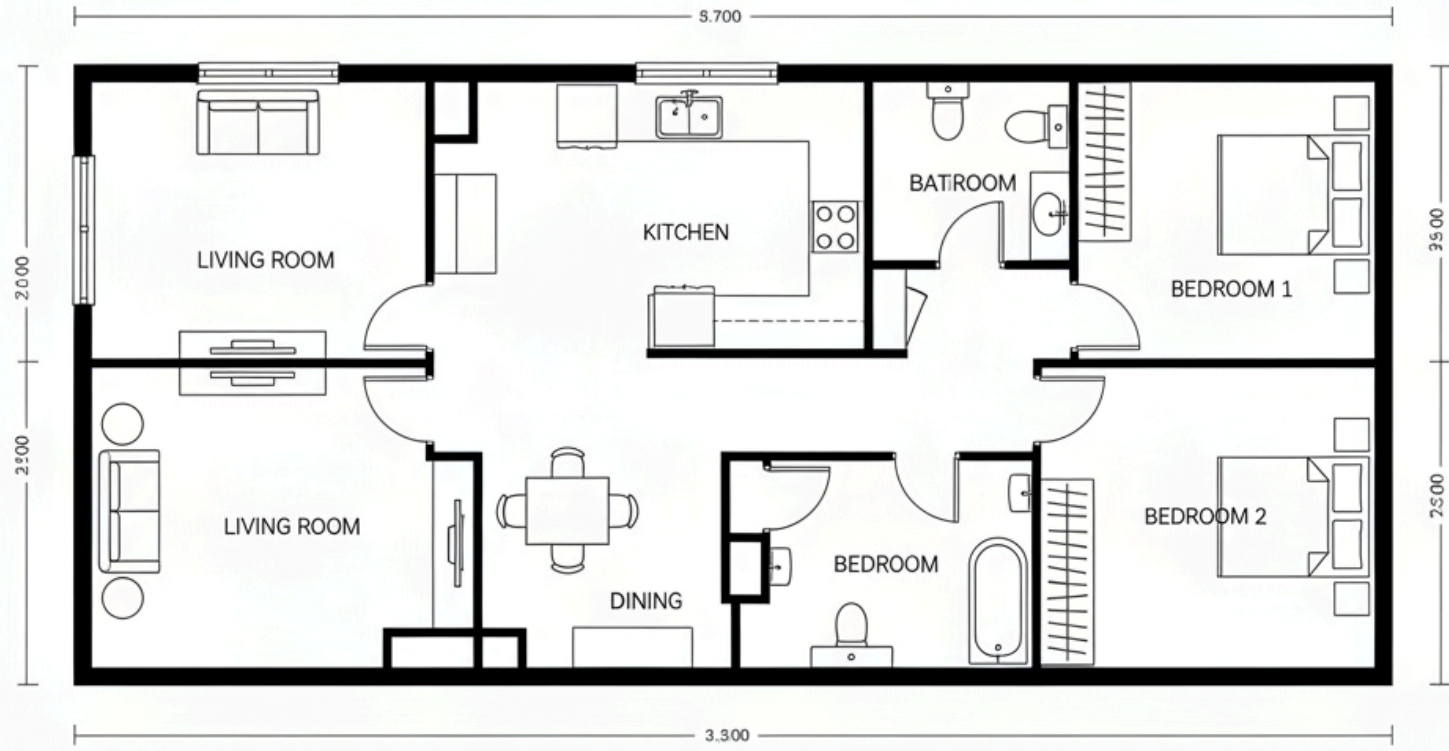

Building Elevation Views

Use arrows to switch views

Front Facade

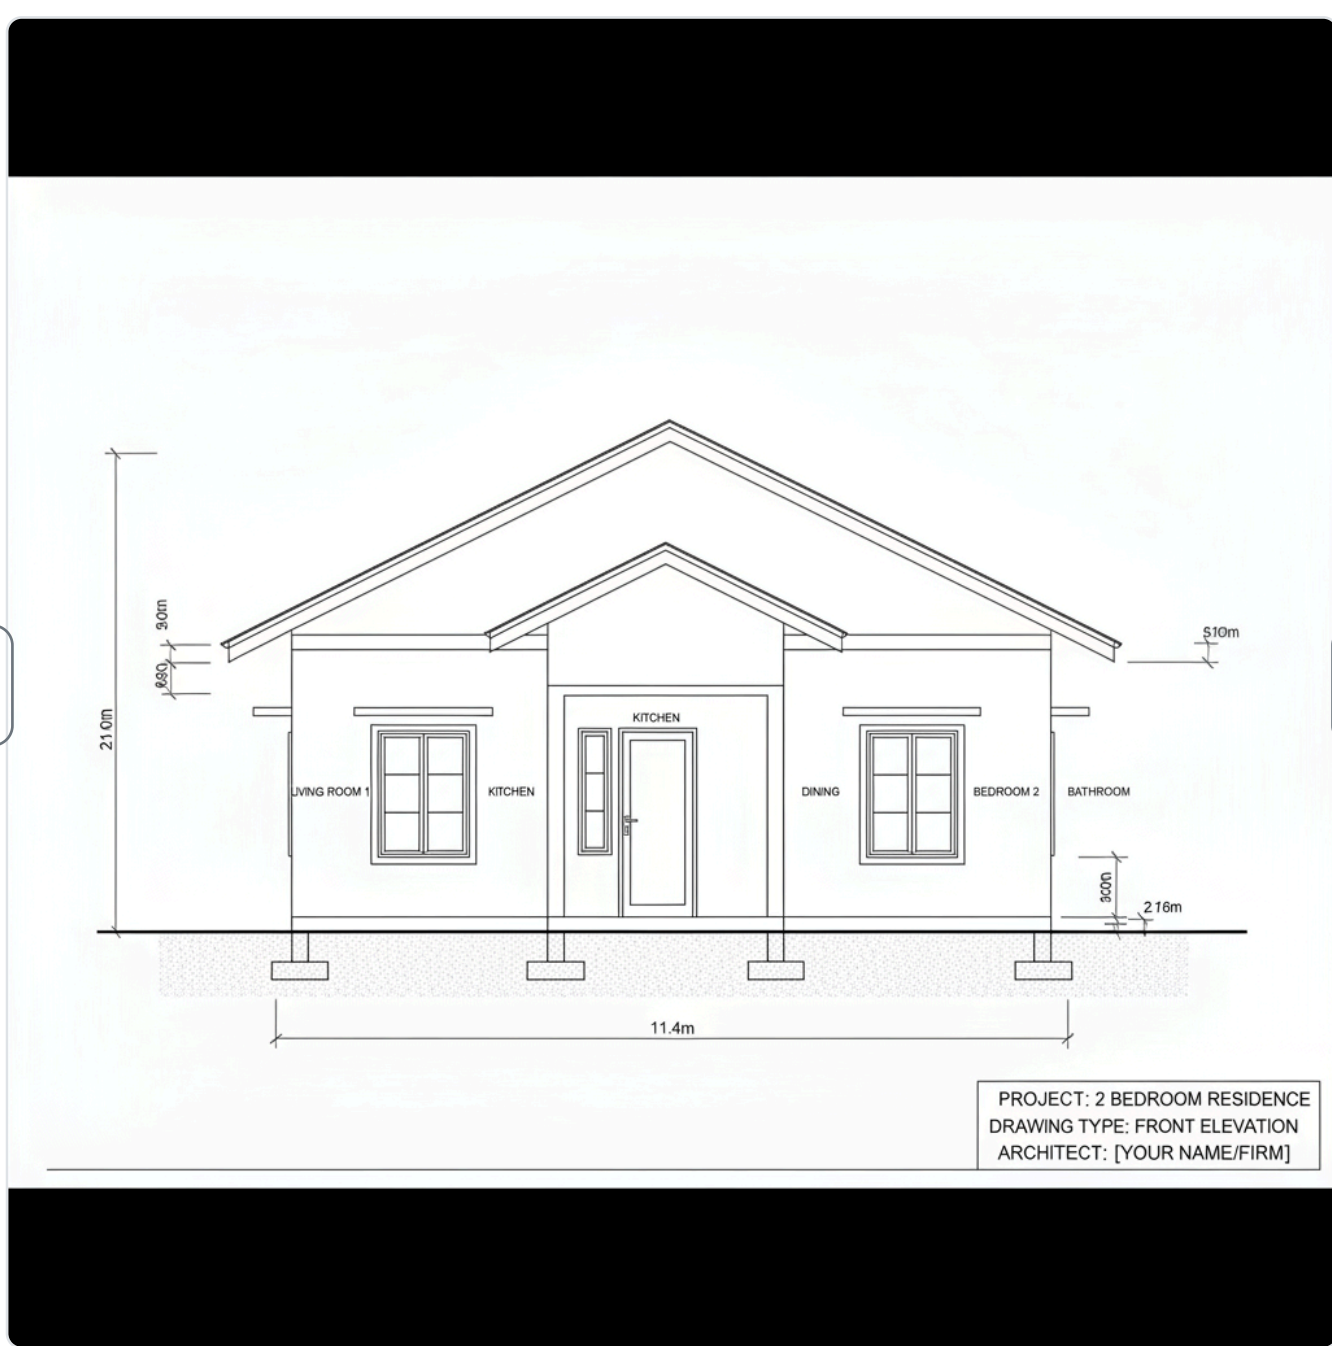

External front view showing building facade

Facade Cross-Section

Quick Stats

sqm sqft

129.0

Area (sqm)

2 BR

Bedrooms

1 BA

Bathrooms

6

Total Rooms

₱18,884

Cost/sqm

63%

Confidence

Cost Estimate (Philippine Peso)

Standard Finish

₱20,000 - ₱30,000/sqm

₱2,301,608

Low Estimate

₱2,436,020

Average Estimate

₱2,570,432

High Estimate

Cost Breakdown



₱1,522,512

Materials

(62.5%)



₱652,505

Labor

(26.8%)



₱43,500

Permits

(1.8%)



₱217,502

Contingency

(8.9%)

See BOQ below for detailed material breakdown



Material Quantities (For Procurement)

Room Specifications

Room	Dimensions	Area
Living Room	4.5m x 4.5m	20.3 sqm
Kitchen	3.7m x 3.7m	13.8 sqm
Dining	3.4m x 3.4m	11.8 sqm
Bedroom 1	3.7m x 3.7m	13.3 sqm
Bedroom 2	3.3m x 3.3m	10.8 sqm
Bathroom	1.8m x 1.8m	3.4 sqm

Bill of Quantities - Structural Materials

Description	Quantity	Unit	Unit Price	Amount
Portland Cement (Class A - Structural)	327.2	bags	₱265.00	₱86,718.60
Portland Cement (Class B - Non-Structural)	119.5	bags	₱265.00	₱31,656.90
Portland Cement (CHB Mortar)	55.6	bags	₱265.00	₱14,734.00
Portland Cement (Plaster/Finishing)	40.7	bags	₱265.00	₱10,785.50
Sand (Class A Concrete)	18.2	m³	₱1,600.00	₱29,088.00
Sand (Class B Concrete)	8.0	m³	₱1,600.00	₱12,742.08
Sand (CHB Mortar)	4.6	m³	₱1,600.00	₱7,408.00
Sand (Plaster/Finishing)	3.4	m³	₱1,600.00	₱5,424.00
Gravel (Class A Concrete)	36.4	m³	₱1,500.00	₱54,540.00
Gravel (Class B Concrete)	15.9	m³	₱1,500.00	₱23,891.40
CHB 4" (Concrete Hollow Blocks)	1,324.0	pcs	₱20.00	₱26,480.00
Steel Rebar 10mm dia. (CHB Vertical Bars) - 29 pcs @ 6m	104.5	kg	₱47.30	₱4,942.85
Steel Rebar 10mm dia. (CHB Horizontal Bars) - 38 pcs @ 6m	140.5	kg	₱47.30	₱6,645.65
Steel Rebar 10mm dia. (Floor Slab) - 144 pcs @ 6m	534.9	kg	₱47.30	₱25,300.77
Steel Rebar 16mm dia. (Footings) - 48 pcs @ 6m	316.0	kg	₱47.30	₱14,946.80
Steel Rebar 16mm dia. (Column Main Bars) - 84 pcs @ 6m	795.4	kg	₱47.30	₱37,622.42
Steel Rebar 10mm dia. (Column Ties) - 139 pcs @ 6m	513.4	kg	₱47.30	₱24,283.82
Steel Rebar 10mm dia. (Roof Beam Main Bars) - 14 pcs @ 6m	49.8	kg	₱47.30	₱2,356.01
Steel Rebar 10mm dia. (Roof Beam Ties) - 27 pcs @ 6m	99.6	kg	₱47.30	₱4,710.13
TOTAL STRUCTURAL MATERIALS:				₱424,276.93

This BOQ covers structural materials only (cement, sand, gravel, CHB blocks, steel reinforcement). Other material categories (electrical, plumbing, finishes, etc.) are included in the total Materials cost above.

AI Design Suggestions

A compact and efficient layout designed for smaller footprints. The Living Room is at the front, leading to the Dining and Kitchen area. Bedrooms are located at the back of the house for privacy, with easy access to the bathroom. Design Notes: • The Kitchen and Dining are adjacent, which makes meal preparation and serving easier. • Bedroom sizing aims for comfortable use of space while keeping in mind Philippine building code minimums ⚠️ Building Code Warnings: • Bedroom 1 and Bathroom should be adjacent but are in non-adjacent slots • Bathroom and Bedroom 1 should be adjacent but are in non-adjacent slots

Configuration

Lot Shape: Rectangular

Additional Rooms: Kitchen, Living Room, Dining Room

Generated: February 10, 2026 at 11:06 AM